



Department of Transportation

State of Georgia
#2 Capitol Square, S.W.
Atlanta, Georgia 30334-1002

HAROLD E. LINNENKOHL
COMMISSIONER
(404) 656-5206

DAVID E. STUDSTILL, JR.,
CHIEF ENGINEER
(404) 656-5277

LARRY E. DENT
DEPUTY COMMISSIONER
(404) 656-5206

EARL L. MAHFUZ
TREASURER
(404) 656-5224

August 24, 2006

Mr. Larry Booth
Willacoochee Industrial Fabrics
P. O. Box 599
Highway 82 West
Willacoochee, GA 31650

Dear Mr. Booth:

Subject: Annual Product Evaluation

Enclosed are copies of the test reports for the products that you submitted for Georgia DOT product evaluation. The Department has approved the following products for use on our construction and maintenance projects. These products will be listed in the Qualified Products List as long as they continue to meet current specifications and perform adequately in the field.

<u>QPL-36</u>	<u>Silt Fence Fabric</u>	<u>Trade Name</u>	<u>Type</u>
		1215 Silt Fence	A
		1216 Silt Fence	A
		2098 Silt Fence	C

If you have any questions concerning this matter, please feel free to contact:

Brad Young (404) 363-7560 or
Brennan A. Roney (404) 363-7606
Georgia Department of Transportation
Office of Materials and Research
15 Kennedy Drive
Forest Park, GA 30297

Products listed in the Qualified Products List (QPL) are subject to yearly evaluation. Samples will be requested at a later date. The QPL is now available on the Internet at <http://tomcat2.dot.state.ga.us/thesource/sti/index.html>.

Sincerely,

Georgene M. Geary, P.E.
State Materials and Research Engineer

GMG:DW:BY:bar

Enclosure



PRODUCT DATA SHEET

2098 Monofilament Silt Fence

PROPERTY	TEST METHOD	MARV
Tensile Strength (Grab)	ASTM D-4632	350/200
Elongation	ASTM D-4632	15%
Puncture	ASTM D-4833	120 lbs
Mullen Burst	ASTM D-3786	450 psi
Trapezoidal Tear	ASTM D-4533	65 lbs
UV Resistance	ASTM D-4355	80%
Apparent Opening Size (AOS)	ASTM D-4751	40 US Std. Sieve
Percent Open Area (POA)	CW-02215 Mod.	6%
Permittivity	ASTM D-4491	.5 sec ⁻¹
Water Flow Rate	ASTM D-4491	75 gpm/ft ²
Roll Sizes		36"

The property values listed above are subject to change without notice.

Willacoochee Industrial Fabrics
Quality at Competitive Prices.

769 West Main Street
PO Box 599
Willacoochee, GA 31650

PH: 912-534-5757
FAX: 912-534-5533
www.winfabusa.com

CUSTOMER: EFS INCORPORATED (ENGINEERED FABRIC SPECIAL)


INVOICE: E67211

PRODUCT: WELDED UTILITY FENCE

This is to certify that the products mentioned below are manufactured under standard procedures and that the quality verifications show the compliance to the following specifications

	DESCRIPTION	STANDARD
Material	Galvanized Wire, Regular Zinc Coating	ASTM A-641-98
Product	Wire Gauge: 14 (0.073"-0.077") Opening: 4"X4" Height: 28" Length: 200ft	ASTM A-641-98

Code: 7796





Juan Fernando Gonzalez M.
Technical Service Manager



STUDDED T-POST SPECIFICATION SHEET

MATERIAL	Hot rolled rail steel (ASTM A499) or new billet possessing physical properties equivalent to A499
MANUFACTURING LOCATIONS	Columbia, SC; Magnolia, AR; San Marcos, TX; Brigham City, UT
AVAILABLE WEIGHTS	1.25 lbs/ ft (normal) *Required weight for ASTM A702 certification
LENGTHS	5.00' ** Available in bare steel only
COATINGS	bare steel
PACKAGING	For lengths 5.0' and greater, 200 piece master bundle consisting of 40 sub-bundles of 5 pieces. For 4.0' bare steel, 400 piece master bundles (no sub-bundles) 200 piece bundles available in bare steel at customer's request

GA DOT TYPE C SILT FENCE

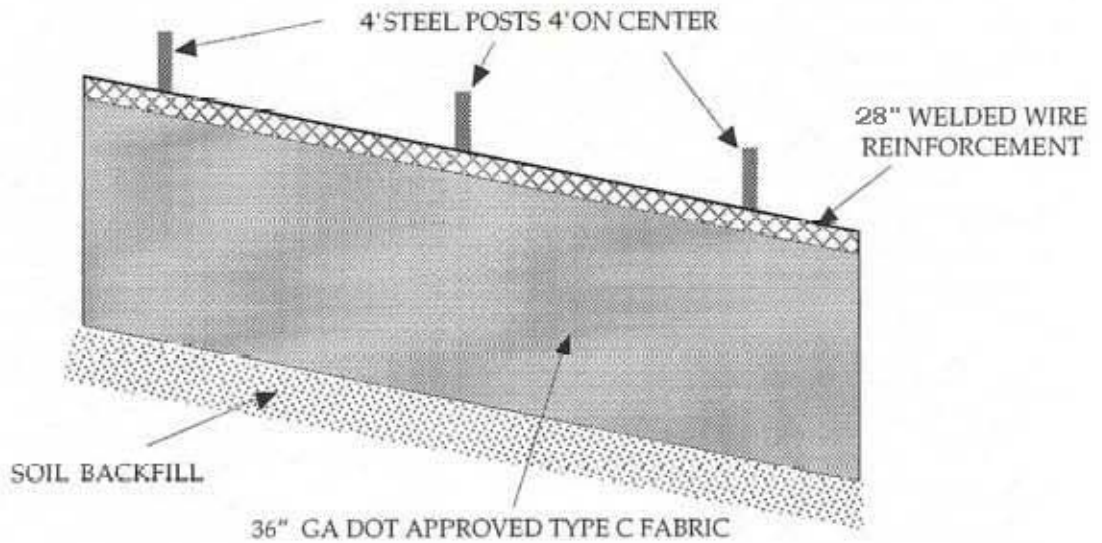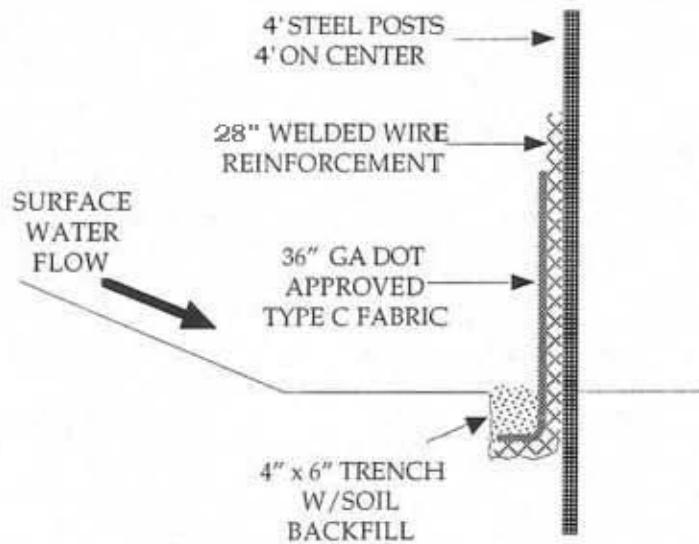

Engineered Fabric Specialists, Inc.
P.O. Box 1430
Norcross, GA 30091-1430

2450 PLEASANTDALE ROAD
ATLANTA, GA 30340
PH: (770)409-1515 FAX: (770)409-1117

GA DOT TYPE C SILT FENCE

PER GA DOT
QUALIFIED PRODUCTS LIST
NO. 36

PROPOSED SILT FENCE
FOR SEDIMENTATION CONTROL

DATE: JANUARY 1, 2003

1
1